

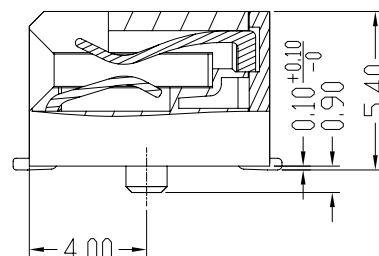
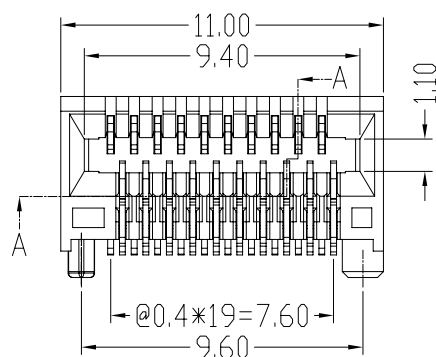
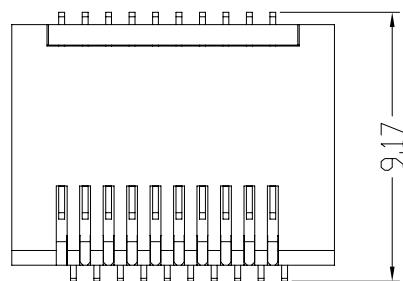


REV.	ECN NO.	DATE

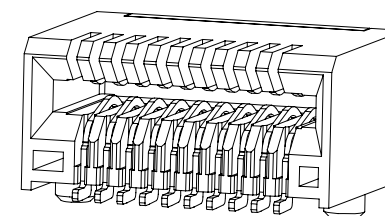

SECTION A-A

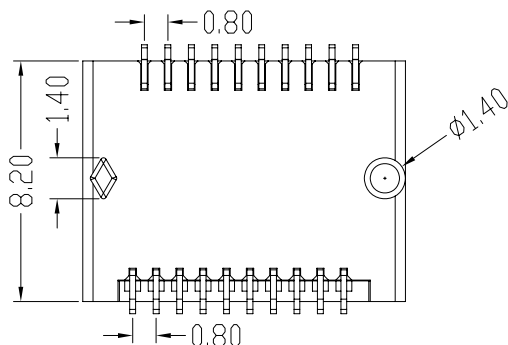

NOTE:

MECHANICAL:

1. TERMINAL: COPPER ALLOY
2. Housing: High Temperature Thermoplastic
Glass Filled UL 94V-0. Color: Black

PLATED:

1. Contact Area : 15u"Min Gold Over 110u" Min Nickle And 100u"Min Tin Over 110u" Min Nickle.

MECHANICAL REQUIREMENT:

1. Durability: 200 cycles.
2. insertion and extraction Force: 40N Max & 11.5N Max


ENVIRONMENTAL:

1. Contact Resistance: 20 Milliohms max initial.
2. Dielectric withstanding Voltage: 300V AC/min.
3. Operation: -55°C~+85°C.
4. Storage: -55°C~+85°C
5. WAVE SOLDERING TEMPERRATURE: 255~265°C (5~10 SECONDS).
6. RoHS COMPLIANT

PART NUMBER: B869S-2015-Y001

RoHS Compliant

® 意华通讯接插件有限公司



A4
SIZE

SCALE
1:1

UNIT
mm

CUSTOMER: N/A
MODEL NO: N/A

TOLERANCES
.0 ± 0.25
.00 ± 0.20
.000 ± 0.15
ANGLES ± 0.5


Material: SEE NOTE
Finish: SEE NOTE
SHEET 1 OF 2

Designed: Neil
Checked:
Approved:

NAME: CONNECTOR, SFP 1XN SMT Type
DWG NO: ESFP-003-01
PART NO: SEE NOTE

REV.
00

REV.	ECN NO.	DATE

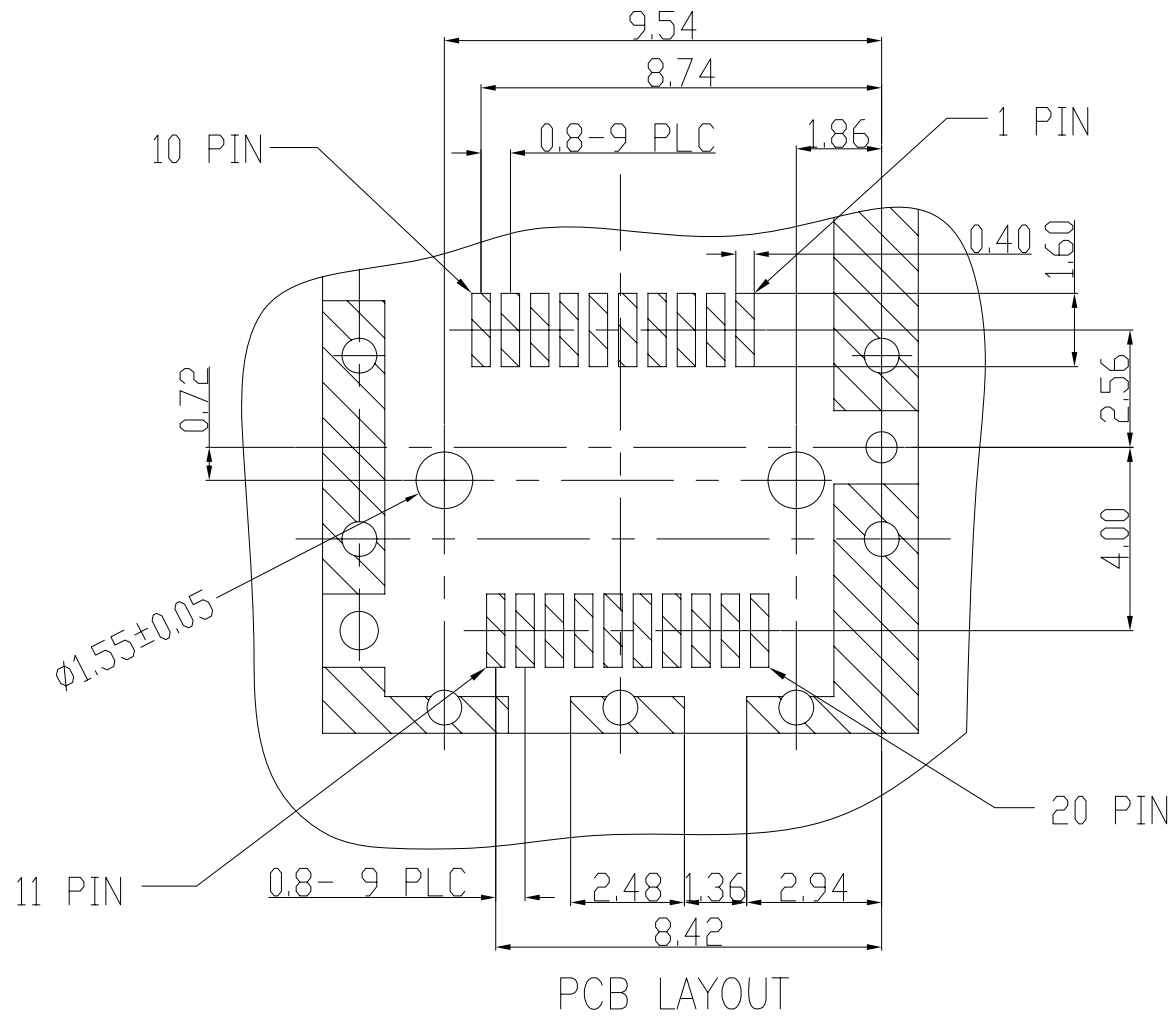

RoHS Compliant

® 意华通讯接插件有限公司

TOLERANCES

.0 ± 0.25
.00 ± 0.20
.000 ± 0.15

ANGLES ± 0.5

Material: SEE NOTE

Finish: SEE NOTE

SHEET 2 OF 2

Designed: Neil

Checked:

Approved:


NAME: CONNECTOR, SFP 1XN SMT Type

DWG NO: ESFP-003-01

PART NO: SEE NOTE

REV.

00



A4
SIZE

SCALE
1:1

UNIT
mm

CUSTOMER: N/A
MODEL NO: N/A